

1 BASIN GAS PASTA-COOKER 40 LT

CODE
CR0990989

MODEL
D92/10CPG

SERIE
DIAMANTE90

Project:
Rev.:
Zone:
Location:



GENERAL FEATURES

- As well as offering a vast range of solutions and 2 mm thick, 90 cm deep worktops with burners up to 10 kW, the series has all the power, robustness and functionality you need to work effectively.
- • AISI 304 stainless steel, Scotch Brite finish
- • Swing door with accessories for holding knives, ladles and bottles
- • Digital control panel with waterproof control knobs
- • Double doors: bottom or side hung
- • Functional side panels with up to 7 containers and holders
- • The modular range: 200-400-600-800-1200
- • Simple, functional coupling system
- • Also available in a plinth-mounted version
- • Wide range of accessories

TECHNICAL DATA

- 1-BASIN GAS PASTA-COOKER 40LTS.
- Outer casing and feet in stainless steel.
- Adjustable worktop height, ranging from 840 to 900 mm.
- Moulded AISI 316 stainless steel pan with rounded edges to guarantee maximum corrosion resistance.
- Electrovalve-controlled fast or slow water loading operations.
- Stainless steel water dispenser and water discharge unit at ground level.
- Safety manostat to avoid heating operations when no water in bowl.
- Stainless steel burner mounted on the outside of the bowl for heating operations.
- Gas safety valve with thermocouple, and electric ignition.
- IPX5 protection against water splashes.

1 BASIN GAS PASTA-COOKER 40 LT

CODE
CR0990989

MODEL
D92/10CPG

SERIE
DIAMANTE90

TECHNICAL INFORMATION

SPECIFICATIONS	DATA
CODE	CR0990989
DEFINITION	D92/10 CPG CUOCIPASTA GAS M40 1V.40LT
MODEL	D92/10 CPG
SUPPLY	MISTA
DEPTH	400 MM
WIDTH	900 MM
HEIGHT	870 MM
NET WEIGHT	89,400
VOLUME	0,313 M3
PACKAGING LENGTH	460,000
PACKAGING WIDTH	1020,000
PACKAGING HEIGHT	1150,000
PACKAGING VOLUME	0,540
PACKAGING GROSS WEIGHT	100,000
POWER SUPPLY VOLTAGE STANDARD	220-240V 1N
FREQUENCY	50 Hz
ELECTRIC POWER	0,015 KW
GAS TYPE	GPL 28-30/37 mbar
GAS POWER (G30/30 MBAR)	14,00 KW
GAS POWER (G25/25 MBAR)	13,50 KW
IPX PROTECTION	IPX5
CERTIFIED MODEL	D92/10 CPG
CERTIFICATION NUMBER	CE-0085BT0057
MINIMUM PRESSURE	150
MAX PRESSURE	500
POT GAS TOT / POT FRIGO2	14,00
CERTIFICATION	0085BT0057
CERTIFICATION BODY	0085
CAPACITY	42 litri
TYPE	1 VASCA
NUMBER OF MODULES	1/2 MODULO

1 BASIN GAS PASTA-COOKER 40 LT

CODE
CR0990989

MODEL
D92/10CPG

SERIE
DIAMANTE90

ACCESSOIRES

CODE	MODEL	DESCRIPTION
CR0999079	CCP12	PASTA COOKER BASKET GN1/2
CR0999089	CCP13L	PASTA COOKER BASKET GN1/3
CR0999099	CCP13F	CCP13F BASKET CP GN1/3 IMP. FRONTAL
CR1356219	CCP13F60	PASTA COOKER BASKET1/3
CR0999109	CCP16D	PASTA COOKER BASKET GN1/6
CR0999119	CCP16S	PASTA COOKER BASKET GN1/6
CR0999129	CCP19	PASTA COOKER BASKET GN1/9
CR0999149	GFCP40	BOTTOM GRID FOR TANK 40 LT
CR0999169	CVCP40	LID FOR TANK 40 LT
CR0999179	9KIT-A	BASKET KIT
CR0999189	9KIT-B	BASKET KIT
CR0999199	9KIT-C	BASKET KIT
CR0999209	9KIT-D	BASKET KIT
CR0789950		
CR0789960		
CR0592779	NXZF4	FRONTAL PLINTH
CR0592830	NX9ZG	PLINTH JUNCTION
CR0592820	NX9ZL	LATERAL PLINTH
MA97432000	NXR	CASTORS KIT
MA97433000	NXRI	CASTORS KIT
CR0592869	CR0592869	KIT 4 FEET FOR CONCRETE PLINTH INSTALLATION
CR0593580	NX9PT	KIT 4 FEET FOR TOP VERSION
CR0592879	CR0592879	KIT ANTI-TIPPING FEET
CR0592399	NXTVT1	CLOSING PANEL FOR TECHNICAL SPACE
CR0592409	NXTVT2	CLOSING PANEL FOR TECHNICAL SPACE
PTD9DX	PTD9DX	SIDE DIAMANTE PANEL RIGHT
PTD9SX	PTD9SX	SIDE DIAMANTE PANEL LEFT

1 BASIN GAS PASTA-COOKER 40 LT

CODE
CR0990989

MODEL
D92/10CPG

SERIE
DIAMANTE90

we cook with
Diamante

Product's PLUS



Safety pressure switch prevents heating if there is no water in the basin.



Equipment certified for low voltage directive 2014/35 / EU according to the international CB scheme.



Thanks to the IPX5 water jet ingress protection rating, awarded after passing specific tests, knobs and knob bezels can be washed at the end of the working day without affecting performance or safety.

1 BASIN GAS PASTA-COOKER 40 LT


CODE
CR0990989

MODEL
D92/10CPG

SERIE
DIAMANTE90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

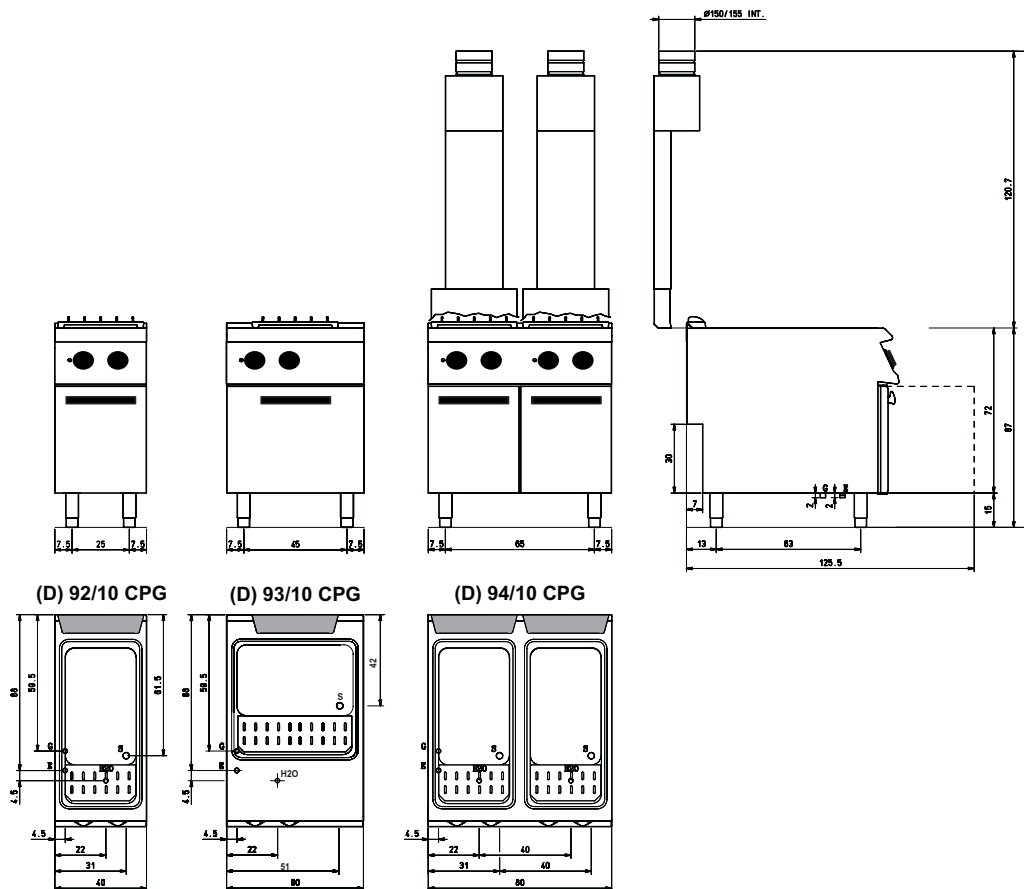

Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O** Attacco arrivo acqua - Wasseranschluss - Water inlet
Arrivée eau - Union de agua - Wateraansluiting
EN ISO 228-1 G 3/4
- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief
Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- G** Attacco arrivo gas - Gasanschluss - Gas connection
Arrivée gaz - Union de gas - Gasaansluiting
EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
- S** Attacco scarico acqua - Wasserablauf - Water outlet
Vidange de l'eau - Desaguadero - Wateraftapaansluiting
EN 10226-1 R 1