



MADISON IR120

code: 26-120

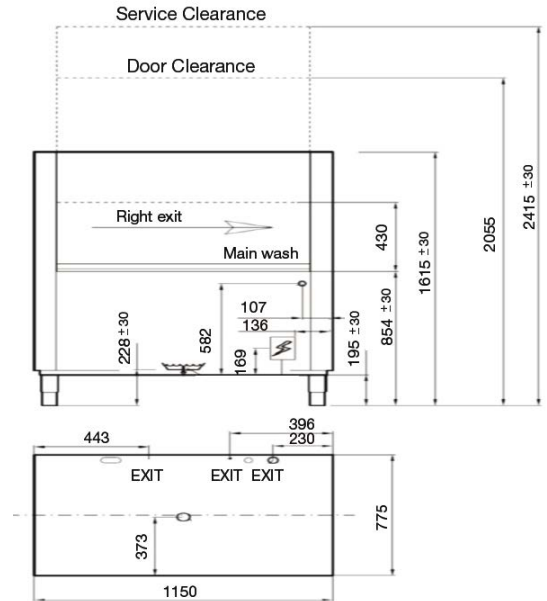

Note: Left or Right Exit Available
Optional drying unit available

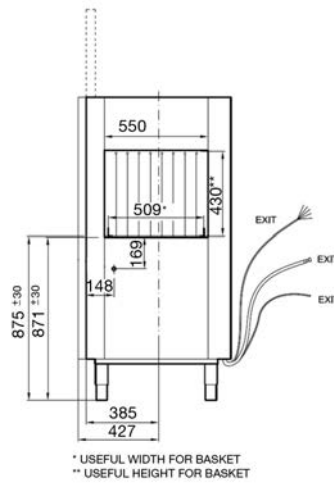

The high powered IR120 rack conveyor speeds through dirty crockery with ease with the ability to complete up to 120 racks per hour!

FEATURES

- **Warranty** - 1 year parts and labour, 3 years on the control board & cabinet (see p.28 for conditions & extended warranty offer)
- Powerful 10500W wash tank element
- Cleans up to 120 racks per hour
- Double flow wash pump
- Rinse pump to ensure rinse pressure is maintained
- Double skinned door insulation for heat retention
- Ergonomic design
- Recirculating wash system
- 3 wash cycle options
- Three phase power
- Deep drawn tank construction
- Rapid recovery boiler for faster turnaround
- Rinse temperature accurately controlled by the thermostat function
- Easy service access minimising maintenance disruption
- Left and Right hand exit available

INCLUSIONS

- 1 x Plate rack 500mm x 500mm
- 1 x Flat rack 500mm x 500mm
- 1 x Cutlery container
- 1 x Drain hose
- 1 x Water connection hose
- 1 x Operating manual

TECHNICAL DATA

Height

Cabinet	1420 mm
Cabinet inc. legs	1585-1645 mm
With door extended	2055-2115 mm
Usable Wash	430 mm

Width

Cabinet	1150 mm
---------	---------

Depth

Cabinet	775 mm
---------	--------

Capacities

Loads/Hour	up to 120*
Water per cycle	160L/hr
Wash Pump	1500W
Rinse Pump	200W
Wash Tank Litres	70
Rinse Tank Litres	17
Element (wash)	10500W
Element (rinse)	9500W
Detergent Injection	no
Rinse Aid Injection	no

Temperatures

Wash Degrees C	60 °C
Rinse Degrees C	82 °C

Plumbing

Drain	Gravity
Water	¾" BSP (hot)

Electrical

Volts/Hz/Phase	400V/50Hz/3+N
Amps	40Amps/Ph

* Subject to incoming water temperature



Water pressure requirements are: 10L/min at 200-400 kPa max.